


Specify Part No. by required width and length.
(e.g.) Width is 58mm and length is 100mm.




FWP - 58100

Parts No.

Motion direction

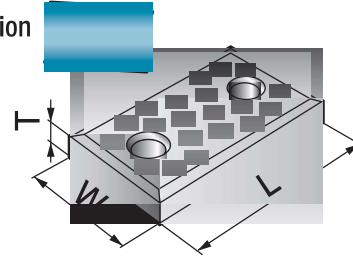


- 500F, is used as base steel.
- Motion directions for FWP-4875 to FWP-200300 are width and length.
- Motion directions for FWP-2875 to FWP-38200 are length direction only.

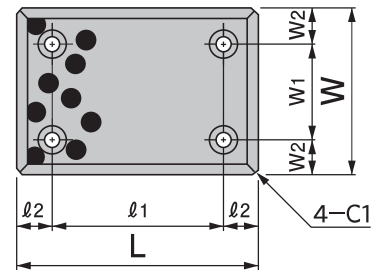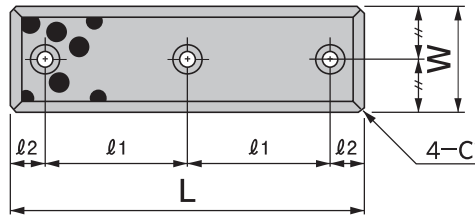


Parts No.	Width		Length		Thickness		Mounting hole intervals			Attach bolts		Chamfering
	W	Tolerance	L	Tolerance	T	Tolerance	l ₁	Tolerance	l ₂	Type	Qty	
FWP-2875	28	$^{-0.1}_{-0.3}$	75	$^{-0.1}_{-0.3}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	C
FWP-28100	28	$^{-0.1}_{-0.3}$	100	$^{-0.1}_{-0.3}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	C
FWP-28125	28	$^{-0.1}_{-0.3}$	125	$^{-0.1}_{-0.3}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	C
FWP-28150	28	$^{-0.1}_{-0.3}$	150	$^{-0.1}_{-0.3}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	C
FWP-28200	28	$^{-0.1}_{-0.3}$	200	$^{-0.1}_{-0.3}$	20	± 0.01	150	± 0.2	25	M10 Hexagon socket head	2	C
FWP-3875	38	$^{-0.1}_{-0.3}$	75	$^{-0.1}_{-0.3}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	C
FWP-38100	38	$^{-0.1}_{-0.3}$	100	$^{-0.1}_{-0.3}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	C
FWP-38125	38	$^{-0.1}_{-0.3}$	125	$^{-0.1}_{-0.3}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	C
FWP-38150	38	$^{-0.1}_{-0.3}$	150	$^{-0.1}_{-0.3}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	C
FWP-38200	38	$^{-0.1}_{-0.3}$	200	$^{-0.1}_{-0.3}$	20	± 0.01	150	± 0.2	25	M10 Hexagon socket head	2	C
FWP-4875	48	$^{-0.1}_{-0.3}$	75	$^{-0.1}_{-0.3}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	B
FWP-48100	48	$^{-0.1}_{-0.3}$	100	$^{-0.1}_{-0.3}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	B
FWP-48125	48	$^{-0.1}_{-0.3}$	125	$^{-0.1}_{-0.3}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	B
FWP-48150	48	$^{-0.1}_{-0.3}$	150	$^{-0.1}_{-0.3}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	B
FWP-48200	48	$^{-0.1}_{-0.3}$	200	$^{-0.1}_{-0.3}$	20	± 0.01	100	± 0.2	50	M10 Hexagon socket head	2	B
FWP-48200A	48	$^{-0.1}_{-0.3}$	200	$^{-0.1}_{-0.3}$	20	± 0.01	150	± 0.2	25	M10 Hexagon socket head	2	B
FWP-48250	48	$^{-0.1}_{-0.3}$	250	$^{-0.1}_{-0.3}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	3	B
FWP-5875	58	$^{-0.1}_{-0.3}$	75	$^{-0.1}_{-0.3}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	B
FWP-58100	58	$^{-0.1}_{-0.3}$	100	$^{-0.1}_{-0.3}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	B
FWP-58125	58	$^{-0.1}_{-0.3}$	125	$^{-0.1}_{-0.3}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	B
FWP-58150	58	$^{-0.1}_{-0.3}$	150	$^{-0.1}_{-0.3}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	B

Cross-section



Chamfering

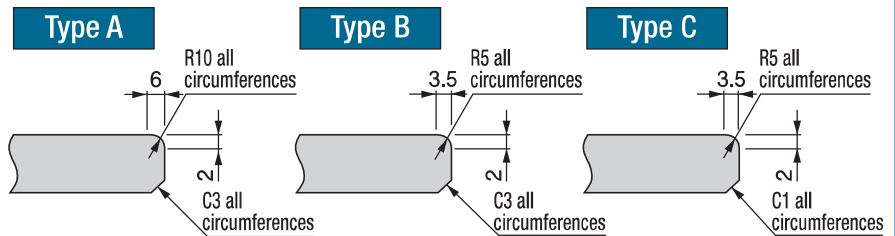

Parts No.	Width		Length		Thickness		Mounting hole intervals					Attach bolts		Chamfering	
	W	Tolerance	L	Tolerance	T	Tolerance	W ₁	Tolerance	W ₂	ℓ ₁	Tolerance	ℓ ₂	Type		Qty
FWP-7575B	75	-0.1/-0.3	75	-0.1/-0.3	20	±0.01	—	—	—	25	±0.2	25	M10 Hexagon socket head	2	A
FWP-75100B	75	-0.1/-0.3	100	-0.1/-0.3	20	±0.01	—	—	—	50	±0.2	25	M10 Hexagon socket head	2	A
FWP-75125	75	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	—	—	—	75	±0.2	25	M10 Hexagon socket head	2	A
FWP-75150	75	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	—	—	—	100	±0.2	25	M10 Hexagon socket head	2	A
FWP-75200	75	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	—	—	—	150	±0.2	25	M10 Hexagon socket head	2	A
FWP-100100	100	-0.1/-0.3	100	-0.1/-0.3	20	±0.01	50	±0.2	25	50	±0.2	25	M10 Hexagon socket head	4	A
FWP-100125	100	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	50	±0.2	25	75	±0.2	25	M10 Hexagon socket head	4	A
FWP-100150	100	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	50	±0.2	25	100	±0.2	25	M10 Hexagon socket head	4	A
FWP-100200	100	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	50	±0.2	25	150	±0.2	25	M10 Hexagon socket head	4	A
FWP-100250	100	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	50	±0.2	25	200	±0.2	25	M10 Hexagon socket head	4	A
FWP-125125	125	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	75	±0.2	25	75	±0.2	25	M10 Hexagon socket head	4	A
FWP-125125A	125	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	50	±0.2	37.5	75	±0.2	25	M10 Hexagon socket head	4	A
FWP-125150	125	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	50	±0.2	37.5	100	±0.2	25	M10 Hexagon socket head	4	A
FWP-125200	125	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	50	±0.2	37.5	150	±0.2	25	M10 Hexagon socket head	4	A
FWP-125250	125	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	50	±0.2	37.5	200	±0.2	25	M10 Hexagon socket head	4	A
FWP-150150	150	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	100	±0.2	25	100	±0.2	25	M10 Hexagon socket head	4	A
FWP-150200	150	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	100	±0.2	25	150	±0.2	25	M10 Hexagon socket head	4	A
FWP-150250	150	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	100	±0.2	25	200	±0.2	25	M10 Hexagon socket head	4	A
FWP-200200	200	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	150	±0.2	25	150	±0.2	25	M10 Hexagon socket head	4	A
FWP-200250	200	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	150	±0.2	25	200	±0.2	25	M10 Hexagon socket head	4	A
FWP-200300	200	-0.1/-0.3	300	-0.1/-0.3	20	±0.01	150	±0.2	25	250	±0.2	25	M10 Hexagon socket head	4	A