






Specify Part No. by required I.D. and Length.
(e.g.) I.D. is 30mm and length is 60mm.

CLF - 3060 Parts No.

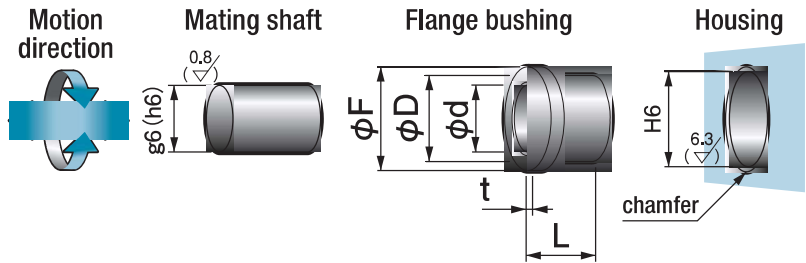

● As for the flange root undercut shape, the shape shown below is also available in addition to that shown in the dimensional drawing on the right.

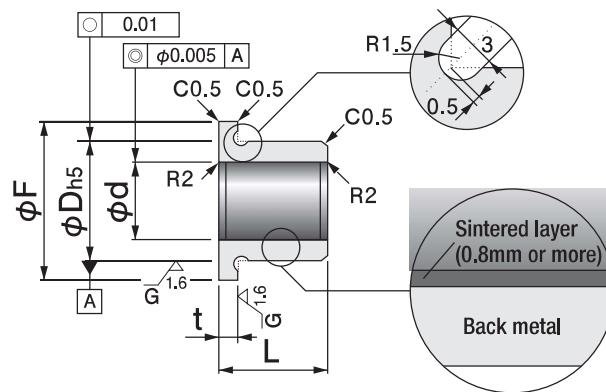

I.D.		O.D.		Flange				Length L						
φd	Tolerance	φD	Tolerance	φF	Tolerance	t	Tolerance	Tolerance $_{-0.3}^0$						
								30	40	50	60	80	100	120
20	+0.013 +0.004	28	$\frac{0}{-0.009}$	38	$\frac{-0.2}{-0.3}$	7	$\frac{+0.05}{0}$	2030	2040					
25	+0.013 +0.004	33	$\frac{0}{-0.011}$	43	$\frac{-0.2}{-0.3}$	7	$\frac{+0.05}{0}$	2530		2550				
30	+0.013 +0.004	38	$\frac{0}{-0.011}$	48	$\frac{-0.2}{-0.3}$	7	$\frac{+0.05}{0}$	3030			3060			
35	+0.016 +0.005	44	$\frac{0}{-0.011}$	54	$\frac{-0.2}{-0.3}$	10	$\frac{+0.05}{0}$		3540			3580		
40	+0.016 +0.005	50	$\frac{0}{-0.011}$	60	$\frac{-0.2}{-0.3}$	10	$\frac{+0.05}{0}$		4040			4080		
50	+0.016 +0.005	62	$\frac{0}{-0.013}$	72	$\frac{-0.2}{-0.3}$	10	$\frac{+0.05}{0}$			5050			50100	
60	+0.019 +0.006	74	$\frac{0}{-0.013}$	84	$\frac{-0.2}{-0.3}$	10	$\frac{+0.05}{0}$				6060			60120

- ▲ By the combination of the highly precise article, clearance of a mating shaft and the bearings become smaller than normal combination. When use under the foreign matter environment, or operating frequency are high, please contact us.
- ▲ The dimensional tolerances are the values measured at +25°C.