





CWP Oiles 2000 Wear Plates



Specify Part No. by required width and length.
(e.g.) Width is 58mm and length is 150mm.


CWP - 58150
Parts No.

Motion direction

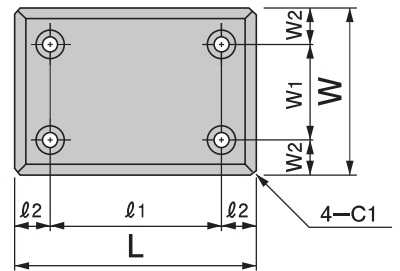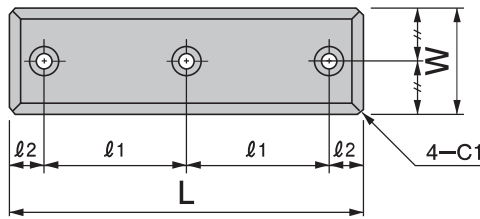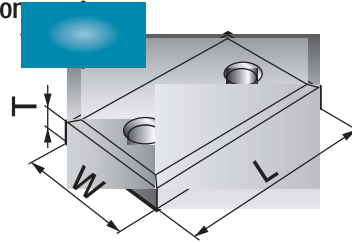


Parts No.	Width		Length		Thickness		Mounting hole intervals		Attach bolts		Chamfering	
	W	Tolerance	L	Tolerance	T	Tolerance	l ₁	Tolerance	l ₂	Type Qty		
CWP-2875	28	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	75	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	D
CWP-28100	28	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	D
CWP-28150	28	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	D
CWP-3875	38	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	75	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	C
CWP-38100	38	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	C
CWP-38150	38	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	C
CWP-4875	48	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	75	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	B
CWP-48100	48	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	B
CWP-48125	48	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	B
CWP-48150	48	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	B
CWP-48200	48	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	50	M10 Hexagon socket head	2	B
CWP-48250	48	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	3	B
CWP-5875	58	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	75	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	45	± 0.2	15	M10 Hexagon socket head	2	B
CWP-58100	58	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	B
CWP-58150	58	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	B

Cross-section

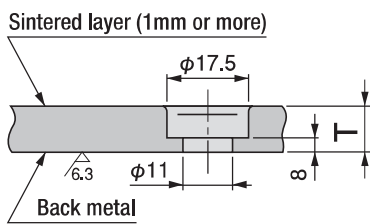

Chamfering

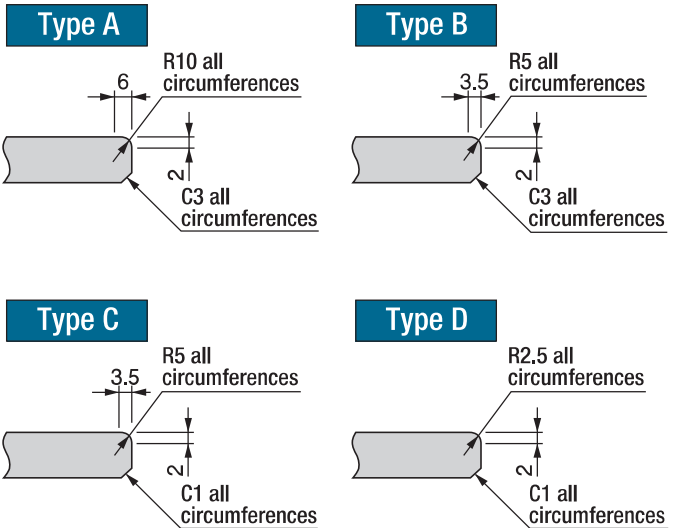

Parts No.	Width		Length		Thickness		Mounting hole intervals					Attach bolts		Chamfering	
	W	Tolerance	L	Tolerance	T	Tolerance	W ₁	Tolerance	W ₂	ℓ ₁	Tolerance	ℓ ₂	Type		Qty
CWP-7575B	75	-0.1/-0.3	75	-0.1/-0.3	20	±0.01	—	—	—	25	±0.2	25	M10 Hexagon socket head	2	A
CWP-75100B	75	-0.1/-0.3	100	-0.1/-0.3	20	±0.01	—	—	—	50	±0.2	25	M10 Hexagon socket head	2	A
CWP-75125	75	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	—	—	—	75	±0.2	25	M10 Hexagon socket head	2	A
CWP-75150	75	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	—	—	—	100	±0.2	25	M10 Hexagon socket head	2	A
CWP-75200	75	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	—	—	—	150	±0.2	25	M10 Hexagon socket head	2	A
CWP-75250	75	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	—	—	—	100	±0.2	25	M10 Hexagon socket head	3	A
CWP-75300	75	-0.1/-0.3	300	-0.1/-0.3	20	±0.01	—	—	—	100	±0.2	50	M10 Hexagon socket head	3	A
CWP-100100	100	-0.1/-0.3	100	-0.1/-0.3	20	±0.01	50	±0.2	25	50	±0.2	25	M10 Hexagon socket head	4	A
CWP-100125	100	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	50	±0.2	25	75	±0.2	25	M10 Hexagon socket head	4	A
CWP-100150	100	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	50	±0.2	25	100	±0.2	25	M10 Hexagon socket head	4	A
CWP-100200	100	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	50	±0.2	25	150	±0.2	25	M10 Hexagon socket head	4	A
CWP-100250	100	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	50	±0.2	25	200	±0.2	25	M10 Hexagon socket head	4	A
CWP-100300	100	-0.1/-0.3	300	-0.1/-0.3	20	±0.01	50	±0.2	25	200	±0.2	50	M10 Hexagon socket head	4	A
CWP-125125	125	-0.1/-0.3	125	-0.1/-0.3	20	±0.01	50	±0.2	37.5	75	±0.2	25	M10 Hexagon socket head	4	A
CWP-125150	125	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	50	±0.2	37.5	100	±0.2	25	M10 Hexagon socket head	4	A
CWP-125200	125	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	50	±0.2	37.5	150	±0.2	25	M10 Hexagon socket head	4	A
CWP-125250	125	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	50	±0.2	37.5	200	±0.2	25	M10 Hexagon socket head	4	A
CWP-125300	125	-0.1/-0.3	300	-0.1/-0.3	20	±0.01	50	±0.2	37.5	200	±0.2	50	M10 Hexagon socket head	4	A
CWP-150150	150	-0.1/-0.3	150	-0.1/-0.3	20	±0.01	100	±0.2	25	100	±0.2	25	M10 Hexagon socket head	4	A
CWP-150200	150	-0.1/-0.3	200	-0.1/-0.3	20	±0.01	100	±0.2	25	150	±0.2	25	M10 Hexagon socket head	4	A
CWP-150250	150	-0.1/-0.3	250	-0.1/-0.3	20	±0.01	100	±0.2	25	200	±0.2	25	M10 Hexagon socket head	4	A