

CWXT Oiles 2000 Wear Plates 10mm Thickness (2 hole type)




Specify Part No. by required width and length.
(e.g.) Width is 100mm and length is 200mm.


CWXT - 100200

Parts No.

Motion direction




- Use the exclusive low-head bolt for mounting.
(LHS-M1020 is attached to CWXT series)




Cross-section

Sintered layer (1mm or more)

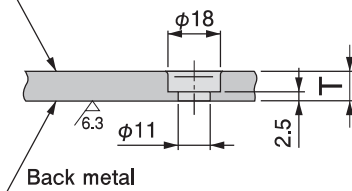


Chamfering

Type A

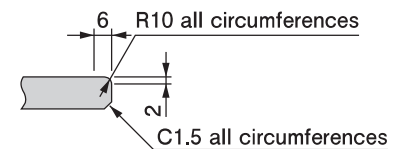

Parts No.	Width		Length		Thickness		Mounting hole intervals			No. of holes	Chamfering
	W	Tolerance	L	Tolerance	T	Tolerance	l ₁	Tolerance	l ₂		
CWXT-100100	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	50	±0.2	25	2	A
CWXT-100125	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	75	±0.2	25	2	A
CWXT-100150	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	150	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	100	±0.2	25	2	A
CWXT-100200	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	200	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	150	±0.2	25	2	A
CWXT-100250	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	250	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	200	±0.2	25	2	A
CWXT-100300	100	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	300	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	200	±0.2	50	2	A
CWXT-125125	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	75	±0.2	25	2	A
CWXT-125150	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	150	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	100	±0.2	25	2	A
CWXT-125200	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	200	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	150	±0.2	25	2	A
CWXT-125250	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	250	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	200	±0.2	25	2	A
CWXT-125300	125	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	300	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	200	±0.2	50	2	A
CWXT-150150	150	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	150	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	100	±0.2	25	2	A
CWXT-150200	150	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	200	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	150	±0.2	25	2	A
CWXT-150250	150	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	250	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	10	±0.01	200	±0.2	25	2	A

- LHS Exclusive Bolt for CWXT
(Parts No. : **LHS-M1020**)

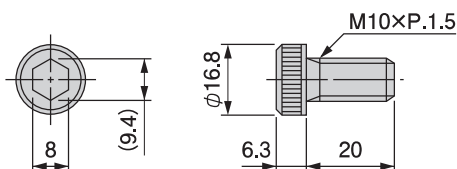

- Exclusive bolt LHS-M1020 is attached to CWXT plate.
- The Exclusive bolt has approximate breaking torque of JIS standard M10 socket head cap screw.
N · m {kgf · m}

Parts No.	LHS-M1020
Recommended tightening torque	67.3 {6.86}
Breaking torque	118 {12.0}

※ Bolt itself is on sale.