



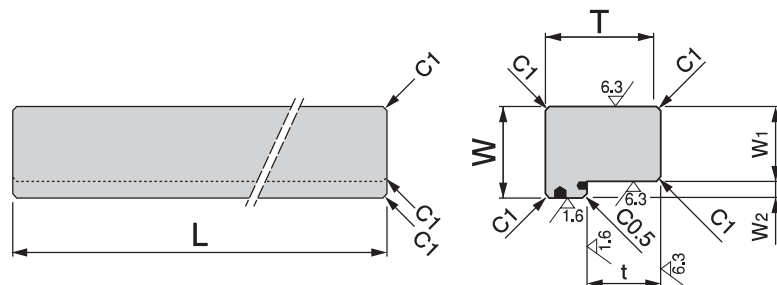


Specify Part No. by required thickness and length.
(e.g.) Thickness is 20mm.

SLI - 20300
Parts No.


- This slide guide rail may be cut to the necessary dimension or bored for bolts.
- The movement direction is lengthwise.

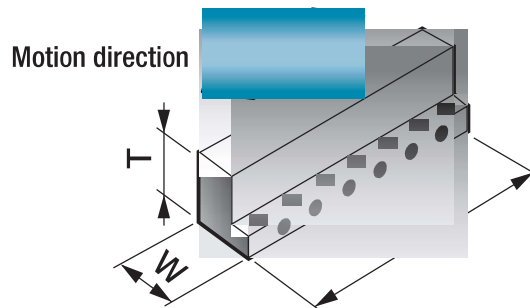

■ Attachment type A



■ Attachment type B



Parts No.	Thickness	Length	Width							Attachment type
	T	L	W	Tolerance	t	Tolerance	W ₁	Tolerance	W ₂	
SLI-20300	20	300	15	$\begin{smallmatrix} -0.01 \\ -0.05 \end{smallmatrix}$	11	$\begin{smallmatrix} +0.05 \\ +0.02 \end{smallmatrix}$	10	$\begin{smallmatrix} 0 \\ -0.05 \end{smallmatrix}$	5	A
SLI-25300	25	300	23	$\begin{smallmatrix} -0.01 \\ -0.05 \end{smallmatrix}$	10	$\begin{smallmatrix} +0.05 \\ +0.02 \end{smallmatrix}$	15	$\begin{smallmatrix} 0 \\ -0.05 \end{smallmatrix}$	8	B