


For Semiconductor Industry

# ZT17

## High Temperature Pressure Sensor (Suitable for 200°C)

Supports measurements up to 200°C!  
Pressure sensor for high temperature applications in  
semiconductor manufacturing processes

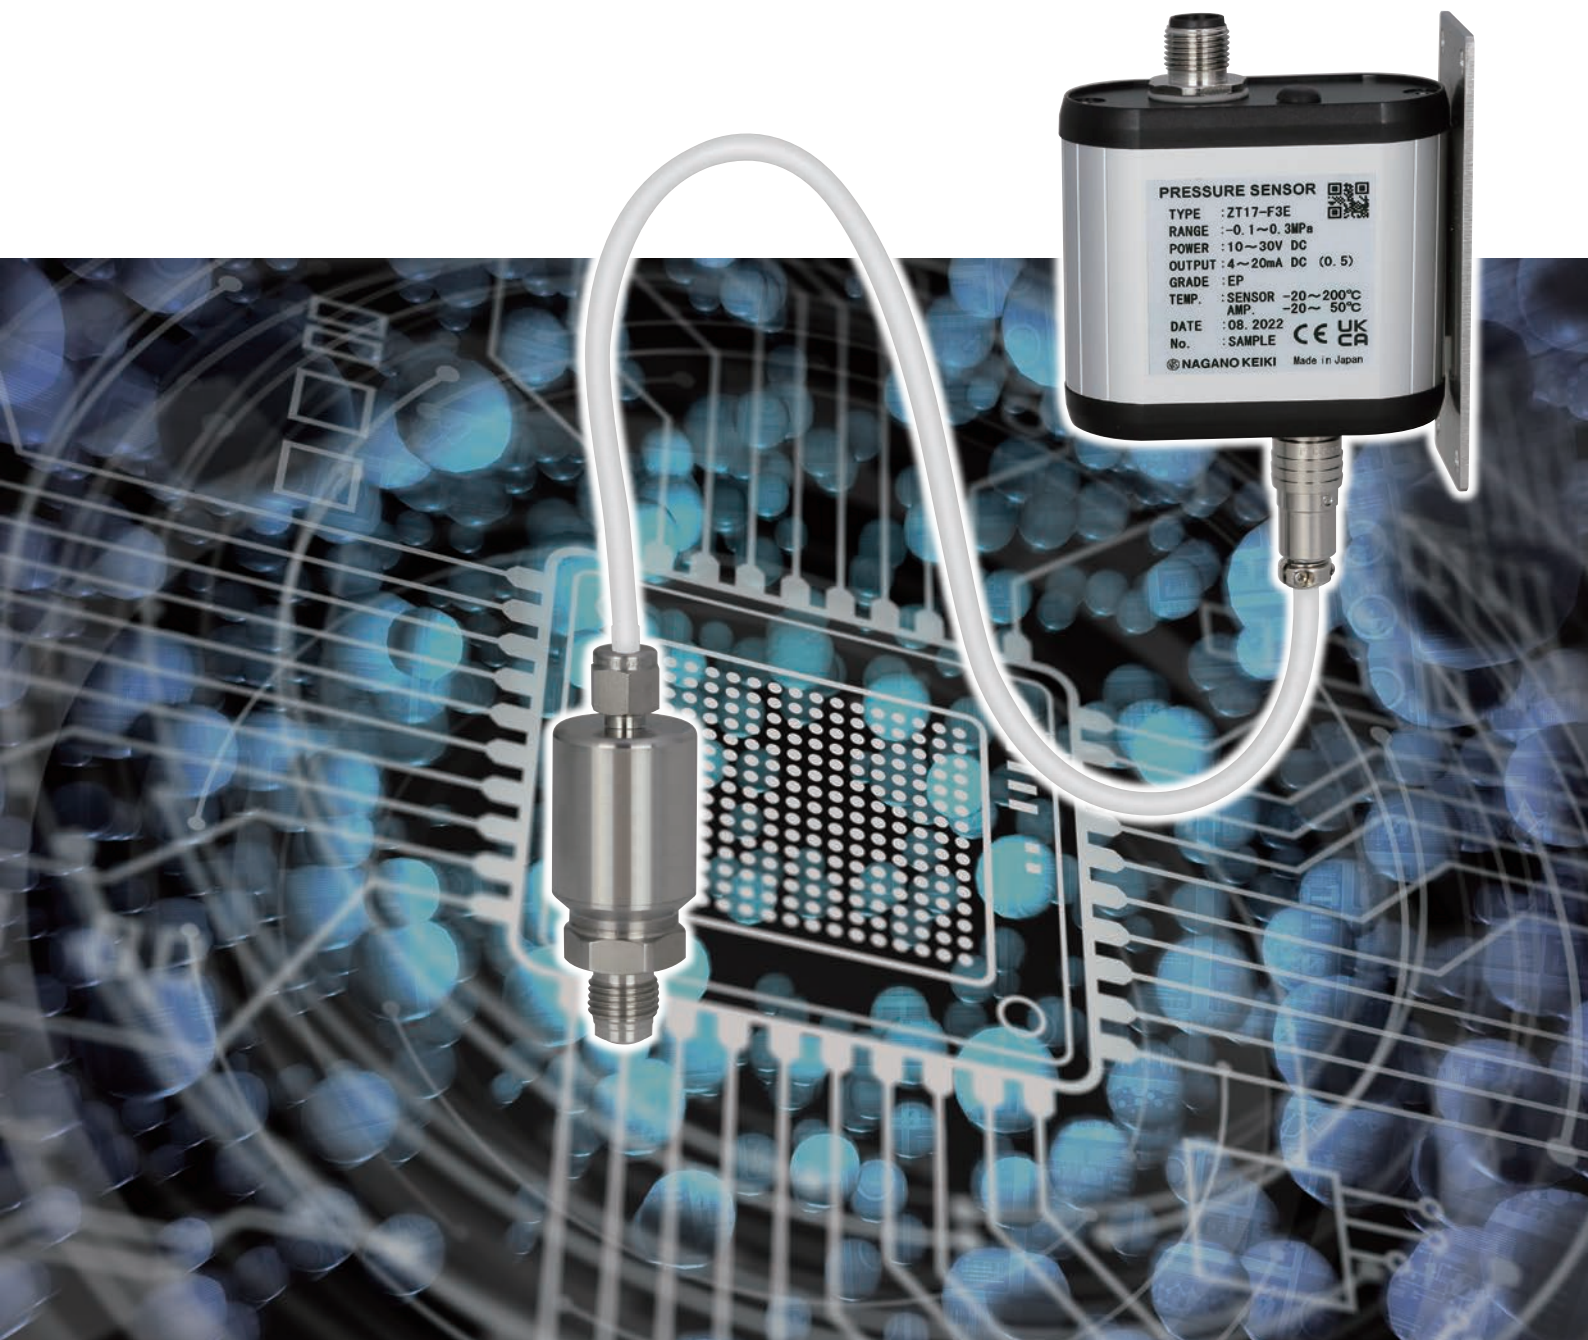


# ZT17 High Temperature Pressure Sensor (Suitable for 200°C)


## Features

- **High temperature measurement of 200°C**  
Equipped with a newly developed pressure sensor element and supports 200°C measurement
- **Achieves high-precision high-temperature measurement**  
Temperature characteristics  
ZERO:  $\pm 1.0\%$  F.S.  
SPAN:  $\pm 3.0\%$  F.S.  
(Temperature compensation range 15 to 200°C)
- **Minimizes retention of measurement gases**  
Welded structure suitable for gas supply system  
Special surface treatment technology

## Operating temperature

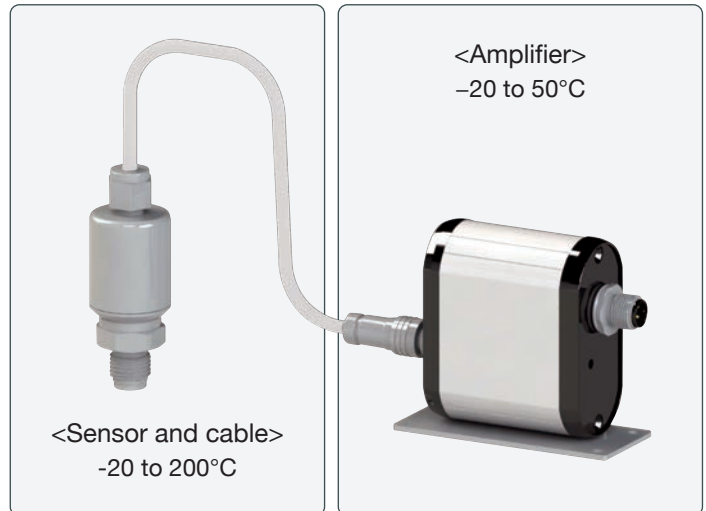


## Applications

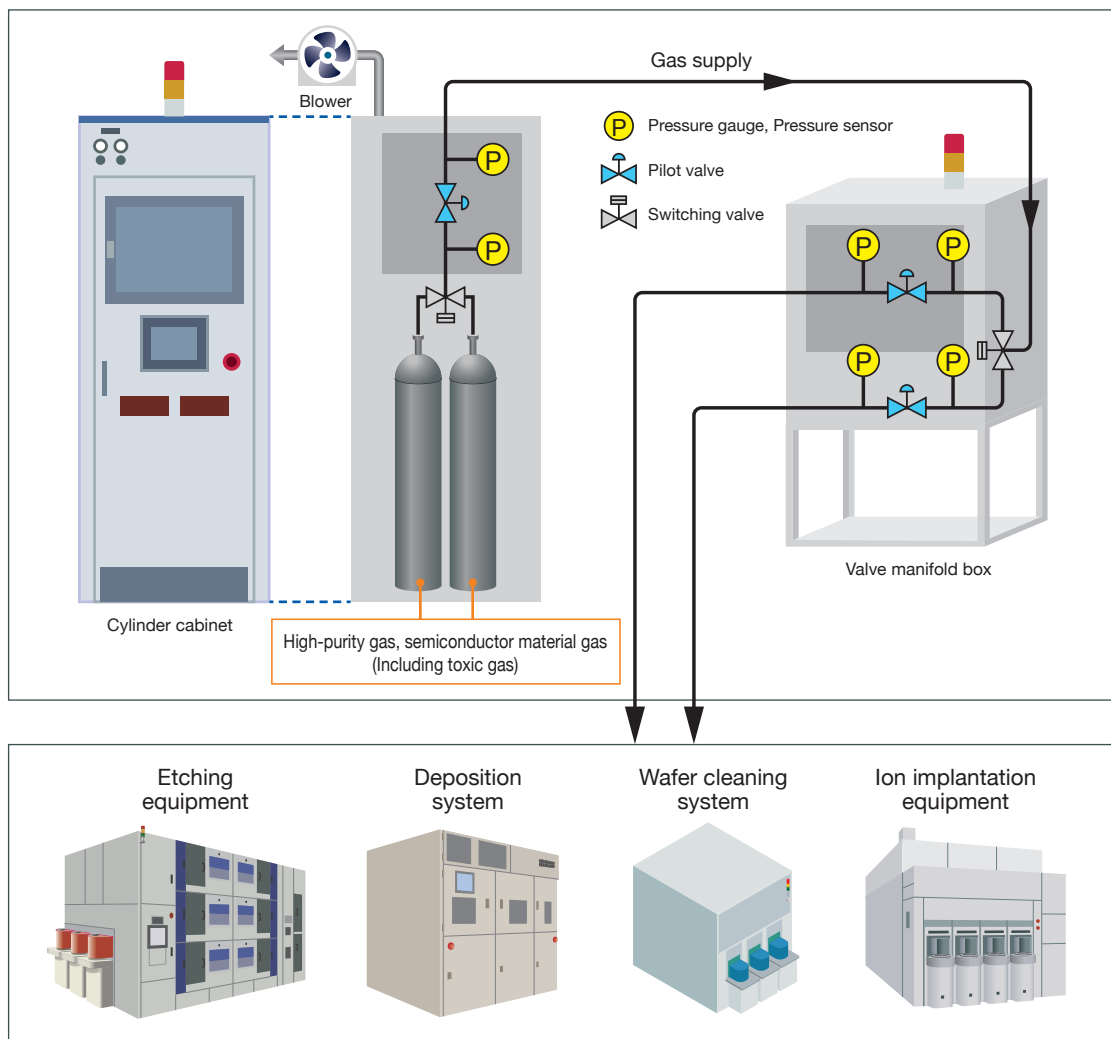

Suitable for high temperature applications in semiconductor manufacturing processes such as supercritical cleaning and vaporization equipment

Welded structure suitable for semiconductor gas supply system and special surface treatment technology minimizes retention of measured gases.

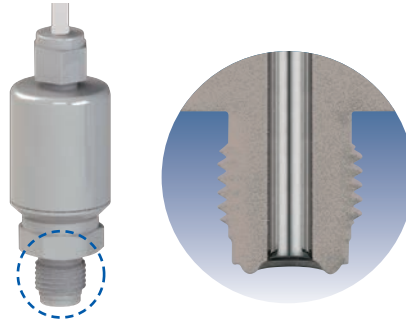

## Grade

Grade	EP
Roughness of gas contact part	0.18 $\mu$ m Ra Avg.
Gas contact parts	SUS316L
Pressure sensor materials	SUS316L
Fitting	SUS316L
Max. allowable pressure* <sup>1</sup>	150% of pressure range
Leakage (Helium leak rate)	5 $\times$ 10 <sup>-12</sup> Pa·m <sup>3</sup> /s or less
Particle	Zero count for size 0.1 $\mu$ m or greater (In our inspection standard)
Cleaning	Ultra clearance (cleaning)
Recommended gas* <sup>2</sup>	High-purity gas, semiconductor material gas, etc.

\*1: Allowable maximum pressure is the upper limit to which pressure may be temporarily increased while still allowing normal pressure to be resumed, when pressure levels return to the normal (rated) range. It is not guaranteed to have no impact on functionality in the case of repeated pressure or static pressure increases lasting 10 minutes or more.

\*2: Please confirm that the gas contact part material is suitable for the gas to be measured.

## Specifications


Item	Descriptions		
Fitting	Fitting shape	Type S	Type T Male Integrated
	Connection	Compatible with 1/4 VCR <sup>®</sup> , 1/4UJR <sup>™</sup>	Compatible with 1/4 VCR <sup>®</sup> , Compatible with 1/2 (3/8) VCR <sup>®</sup>
Pressure sensor seal method	Welding type		
Pressure range	0 to 0.3, 0.5, 1, 2, 3.5, 5, 10, 20MPa		
	-0.1 to 0.3, 0.5, 1, 2, 3.5, 5, 10, 20MPa		
Power supply voltage	10 to 30V DC		
	* When using 4-20mA DC output, please refer to the following numerical formula for relationship between power supply voltage and load resistance.		
Output	4-20mA DC (2-wire system) or 1-5V DC (3-wire system)		
Load resistance	When using 4-20mA DC output: R max ( $\Omega$ )=50E - 500 [E: Power supply voltage] When using 1-5V DC output: 10k $\Omega$ min.		
Accuracy (including dedicated amplifier)	$\pm$ 0.5% F.S. (at 23°C) (including linearity, hysteresis and repeatability)		
Temperature characteristics (Temperature compensation range)	ZERO: $\pm$ 1.0%F.S. (15 to 200°C)		
	SPAN: $\pm$ 3.0%F.S. (15 to 200°C)		
Operating temperature	Pressure sensor	-20 to 200°C (No icing or condensation) * -20 to 50°C for dedicated amplifier connector	
	Dedicated amplifier	-20 to 50°C (No icing or condensation)	
Storage temperature	Pressure sensor	-20 to 200°C (No icing or condensation) * -20 to 60°C for dedicated amplifier connector	
	Dedicated amplifier	-20 to 60°C (No icing or condensation)	
Insulation resistance	100M $\Omega$ or more (50V DC between housing and all input/output terminals)		
Case material	Pressure sensor	SUS304	
	Dedicated amplifier	Aluminum alloy (Alumite treatment), ABS	
CE marking, UKCA marking	EMC, RoHS		
	* Please use it to connect to the indoor power distribution network which is not affected by the lightning surge voltage and power supply system switching transients.		
Weight	Pressure sensor	Approx. 200 g (Type S, for 1 m cable)	
	Dedicated amplifier	Approx. 180 g (Except cable with M12 connector)	
Zero adjustment mechanism	External adjustment method (side of dedicated amplifier)		

# Pressure Sensor for Semiconductor Industry

## Dimensions [Pressure sensor: Type S]


Unit: mm

### Type S Male Integrated

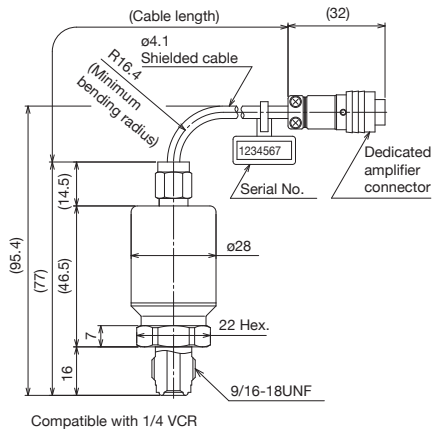


ZT17-F3E

### Type S Male nut

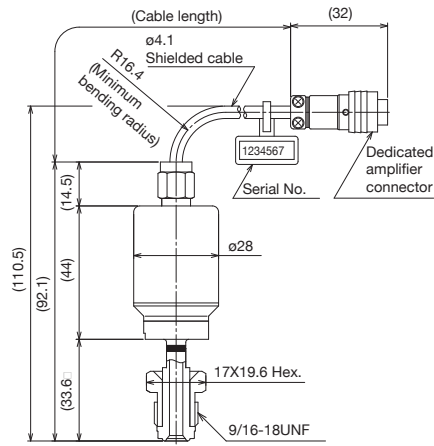

ZT17-FNE

### Type S Female nut

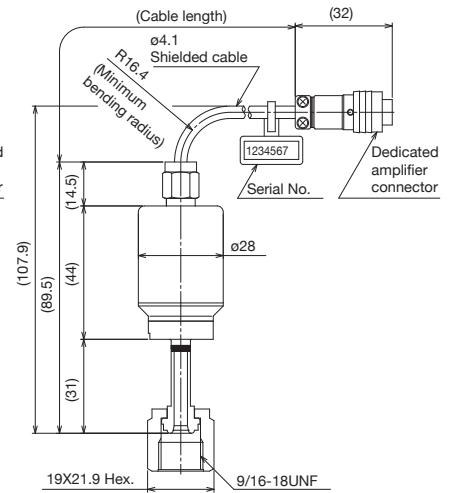


ZT17-FQE

## Dimensions [Pressure sensor: Type T]


Unit: mm

### Type T Male Integrated

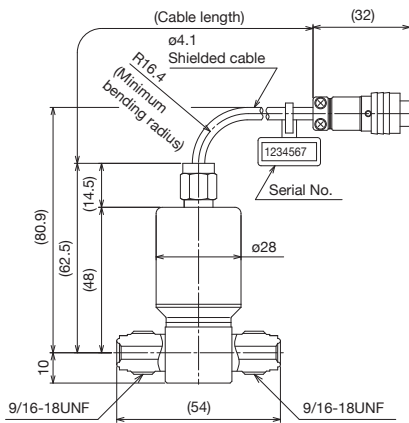


ZT17-E3E


### Type T Male Integrated

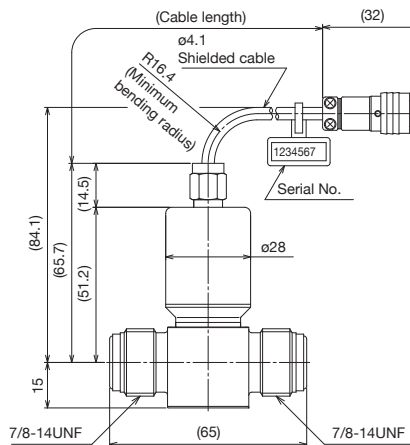

ZT17-E4E



Compatible with 1/4 VCR



Compatible with 3/8 (1/2) VCR


# Pressure Sensor for Semiconductor Industry

## Dimensions

[Dedicated amplifier]

Operating condition: -20 to 50°C

Unit: mm

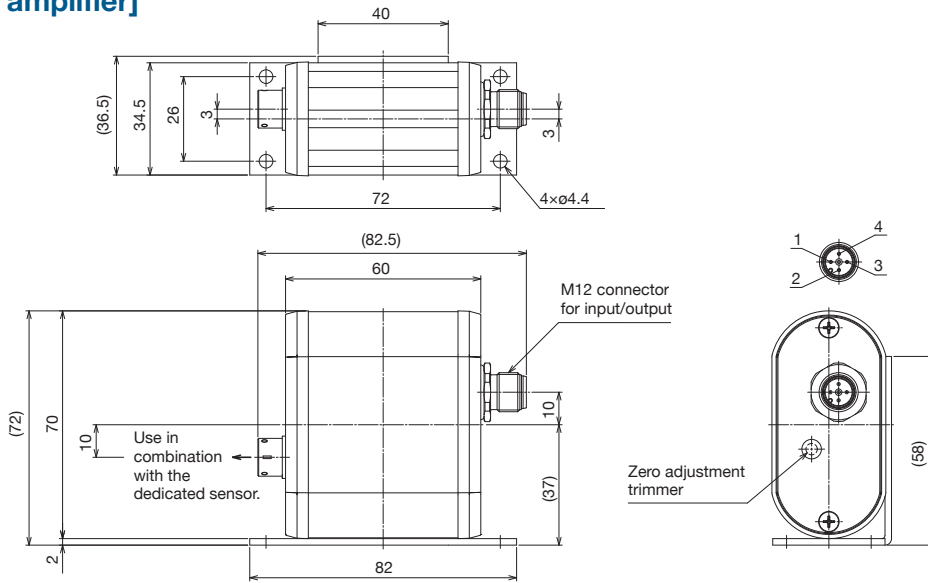

Dedicated amplifier

## Cable with M12 connector (Sold separately)

	PUR Cable (Oilproof)	PVC Cable (Stainless nut)
Straight		
Type L		
Material	①Zinc die-casting (nickel-plated) ②TPU (Green) ③PUR (Black)	①Stainless ②PP (White) ③PVC (Gray)
Cable length (L)	3 m or 5 m	
Conductor cross section	0.34mm <sup>2</sup> (22AWG)	
Core diameter including insulation	1.27 mm	1.26 mm
Sheath outer diameter	4.7 mm	


## Electrical connections

Connector terminal array	Terminal number	2-wire system	3-wire system	Cable color
	1	Power source +	Power source +	Brown
	2	—	—	White
	3	Power source -	Common	Blue
	4	—	Output +	Black

## Caution

Do not use the pressure sensor in facility that may cause ignition or explosion under instrument normal operating atmosphere (excluding the object to be measured).

## Wiring

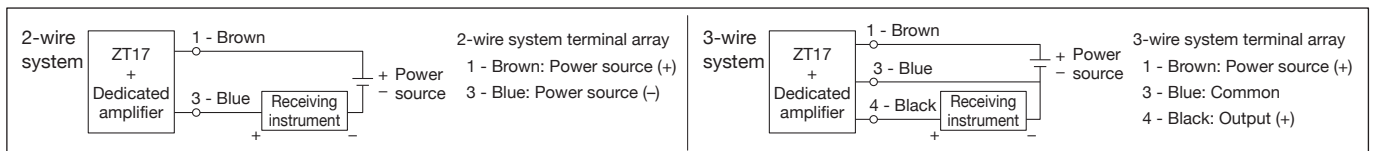

## Model number configuration Please specify the model number, each specs and the range for ordering.

Model name

**Z T 1 7** —

**E** —

**5 M**

**×**

**×**

**×**

**×**

**×**

**×**

**×**

**×**

**×**

High Temperature Pressure Sensor  
For Semiconductor Industry

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩

⑪

⑫

⑬

⑭

⑮

Model name	Selective spec.	Additional spec. (option)
ZT17	[Standard spec.] Operating temperature: -20 to 200°C (Pressure sensor) -20 to 50°C (Dedicated amplifier) External zero adjustment type (side of dedicated amplifier)	Temperature characteristics (Temperature compensation range: 15 to 200°C)

① Mounting	<b>E</b>	Type T Gauge pressure, compound
	<b>F</b>	Type S Gauge pressure, compound

② Connection of fitting	<b>3</b>	1/4	Compatible with VCR® Male Integrated	Type S	Type T
	<b>4</b>	1/2 - 3/8	Compatible with VCR® Male Integrated	×	○
	<b>N</b>	1/4	UJR™ Male nut	○	×
	<b>Q</b>	1/4	UJR™ Female nut*1	○	×

③ Grade, Gas contact parts materials	<b>E</b>	EP Grade •Pressure sensor: SUS316L (all welding) •Fitting : SUS316L
--------------------------------------	----------	--

④ Pressure range	Gauge pressure	<b>1</b>	0 to 0.3MPa
		<b>2</b>	0 to 0.5MPa
		<b>3</b>	0 to 1MPa
		<b>4</b>	0 to 2MPa
		<b>5</b>	0 to 3.5MPa
		<b>6</b>	0 to 5MPa
		<b>7</b>	0 to 10MPa
	Compound	<b>8</b>	0 to 20MPa
		<b>C</b>	-0.1 to 0.3MPa
		<b>D</b>	-0.1 to 0.5 MPa
		<b>E</b>	-0.1 to 1MPa
		<b>F</b>	-0.1 to 2MPa
		<b>G</b>	-0.1 to 3.5MPa
		<b>H</b>	-0.1 to 5MPa
<b>J</b>	-0.1 to 10MPa		
<b>K</b>	-0.1 to 20MPa		

Please specify the pressure range and units separately besides selection of range code.

⑤ Accuracy	<b>5</b>	±0.5 %F.S.
------------	----------	------------

⑥ Power supply	<b>M</b>	10 to 30V DC
----------------	----------	--------------

\*1: EP Grade: Without pure ring

Note) M12 connector cable for output is not supplied.

When the M12 connector cable is required, please specify separately.

⑦ Output	<b>1</b>	4 to 20mA DC (2-wire system)
	<b>8</b>	1 to 5V DC (3-wire system)

⑧ Cable length (Between pressure sensor and dedicated amplifier)	<b>B</b>	Cable length: 1 m (standard)
	<b>C</b>	Cable length: 2 m
	<b>D</b>	Cable length: 3 m (Up to 3 m)

⑮ Documents	<b>0</b>	Not required
	<b>1</b>	Required Refer to the price sheet for documents.

Types of cables with M12 connector		
PUR Cable	Straight	Cable length 3 m
	Type L	Cable length 3 m
PVC Cable (Stainless nut)	Straight	Cable length 3 m
	Type L	Cable length 3 m
PUR Cable	Straight	Cable length 5 m
	Type L	Cable length 5 m
PVC Cable (Stainless nut)	Straight	Cable length 5 m
	Type L	Cable length 5 m

The contents of the catalog are subject to change without notice.

 **NAGANO KEIKI**

**NAGANO KEIKI CO., LTD.**

URL : <https://www.naganokeiki.co.jp/>

**HEAD OFFICE & OVERSEAS SALES DEPT**

1-30-4, HIGASHIMAGOME OHTA-KU, TOKYO, JAPAN.

PHONE : +81-3-3776-5328 FAX : +81-3-3776-5447

E-mail : [overseas\\_sales\\_dept@naganokeiki.co.jp](mailto:overseas_sales_dept@naganokeiki.co.jp)