





Specify Part No. by required width and length.  
(e.g.) Width is 18mm and length is 100mm.

**CWA - 18100 N**  
Parts No.

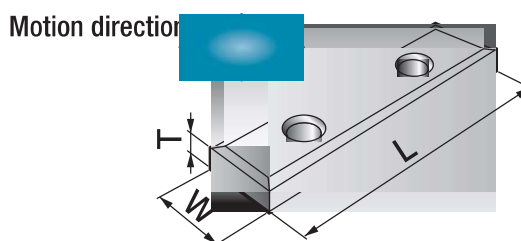

- Use M6×20 hexagon socket head bolt for mounting.

### Cross-section

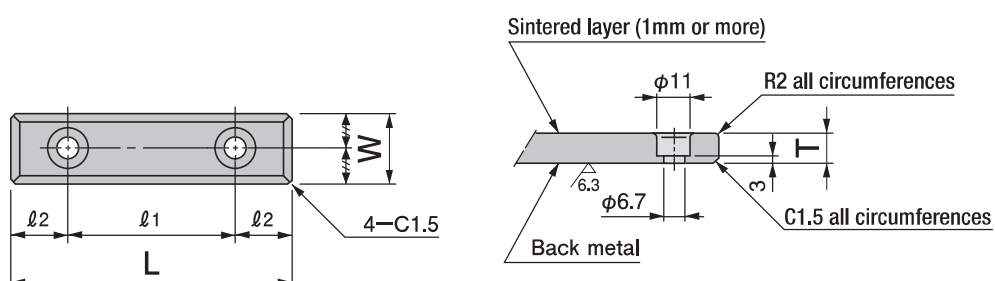

Parts No.	Width		Length		Thickness		Mounting hole intervals			No. of holes
	W	Tolerance	L	Tolerance	T	Tolerance	l <sub>1</sub>	Tolerance	l <sub>2</sub>	
<b>CWA-1875N</b>	18	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	75	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	10	$\pm 0.01$	45	$\pm 0.2$	15	2
<b>CWA-18100N</b>	18	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	10	$\pm 0.01$	50	$\pm 0.2$	25	2
<b>CWA-18125N</b>	18	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	10	$\pm 0.01$	75	$\pm 0.2$	25	2
<b>CWA-18150N</b>	18	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	10	$\pm 0.01$	100	$\pm 0.2$	25	2