

CWPT Oiles 2000 Wear Plates 20mm Thickness (2 hole type)

Selection Guide

Product Information

Plastic Bearing

Multi-layer Bearing

Metallic Bearing

Air Bearings

Slide Shifter

Technical Information


Corporate Profile




Specify Part No. by required width and length.
(e.g.) Width is 125mm and length is 150mm.

CWPT - 125150 Parts No.


Motion direction

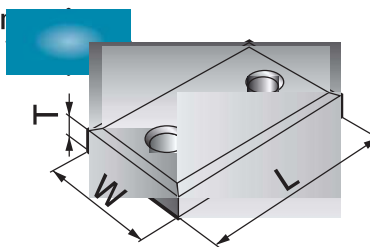


● CTP series were renamed CWPT series.



Cross-section

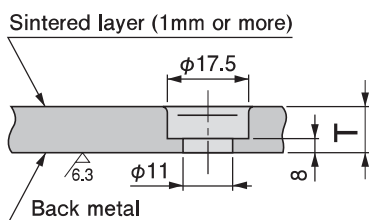

Chamfering

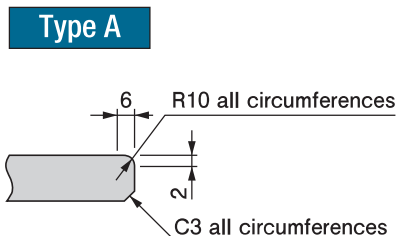

Parts No.	Width		Length		Thickness		Mounting hole intervals			Attach bolts		Chamfering
	W	Tolerance	L	Tolerance	T	Tolerance	l ₁	Tolerance	l ₂	Type	Qty	
CWPT-100100	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	50	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-100125	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-100150	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-100200	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	150	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-100250	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	200	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-100300	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	300	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	200	± 0.2	50	M10 Hexagon socket head	2	A
CWPT-125125	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	75	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-125150	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-125200	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	150	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-125250	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	200	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-125300	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	300	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	200	± 0.2	50	M10 Hexagon socket head	2	A
CWPT-150150	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	100	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-150200	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	150	± 0.2	25	M10 Hexagon socket head	2	A
CWPT-150250	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	± 0.01	200	± 0.2	25	M10 Hexagon socket head	2	A